

ACUMULADORES HIDRONEUMÁTICOS


GALVANIZADO SIN MEMBRANA

AGUA FRÍA (GRUPOS DE PRESIÓN)

CARACTERÍSTICAS TÉCNICAS Y DIMENSIONES

VERTICALES

MODELO	Capacidad l	Presión trabajo bar	Dimensiones					
			D mm	H mm	a.v.	v.s.	b	c
100	100	10	400	1090	1 1/2"	1 1/2"	1/2"	1 1/4"
200	200	10	500	1385	1 1/2"	1 1/2"	1/2"	1 1/4"
300	300	10	550	1615	1 1/2"	1 1/2"	1/2"	1 1/4"
500	500	6	650	1860	1 1/2"	1 1/2"	1/2"	1 1/4"
500	500	8	650	1860	1 1/2"	1 1/2"	1/2"	1 1/4"
500	500	10	650	1860	1 1/2"	1 1/2"	1/2"	1 1/4"
750	750	6	750	2080	1 1/2"	1 1/2"	1/2"	1 1/4"
750	750	8	750	2080	1 1/2"	1 1/2"	1/2"	1 1/4"
750	750	10	750	2080	1 1/2"	1 1/2"	1/2"	1 1/4"
1000	1000	6	800	2373	1 1/2"	1 1/2"	1/2"	1 1/4"
1000	1000	8	800	2373	1 1/2"	1 1/2"	1/2"	1 1/4"
1000	1000	10	800	2373	1 1/2"	1 1/2"	1/2"	1 1/4"

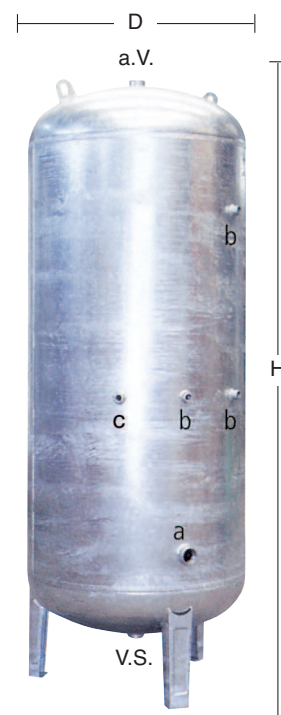

ANTIARIETES HIDRONEUMÁTICOS

CON MEMBRANA RECAMBIABLE

AGUA FRÍA (GRUPOS DE PRESIÓN) -10 °C - +100 °C

CARACTERÍSTICAS TÉCNICAS Y DIMENSIONES

MODELO	Capacidad l	Presión trabajo bar	Dimensiones		Conexión de agua Ø
			D mm	H mm	
25 AHN	25	20	270	550	3"
50 AHN	50	20	360	650	3"
50 AHN	50	25	360	650	3"
50 AHN	50	30	360	650	3"

